

Τ1

Compact, Low-profile Cylindrical Scrubber

- Scrub small and tight spaces with the T1's compact, best-in-class design
- Reduce risk of slip and fall accidents in narrow, congested spaces with excellent water recovery – even in forward and reverse maneuvers
- Improve environmental health by reducing bacteria growth with easy-to-clean-andsanitize Hygenic tanks

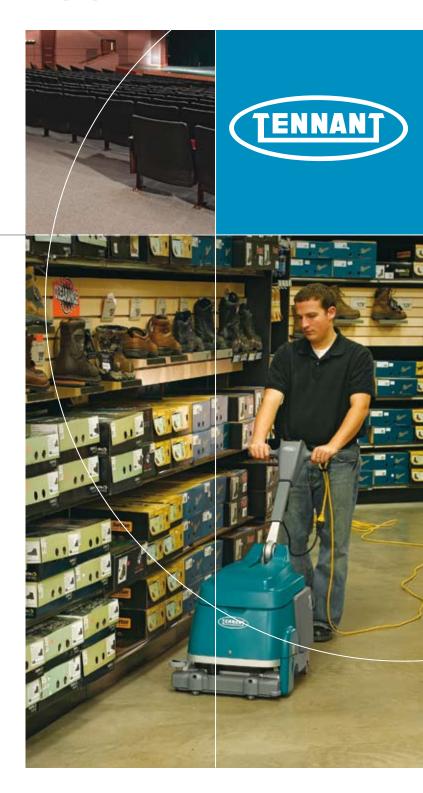

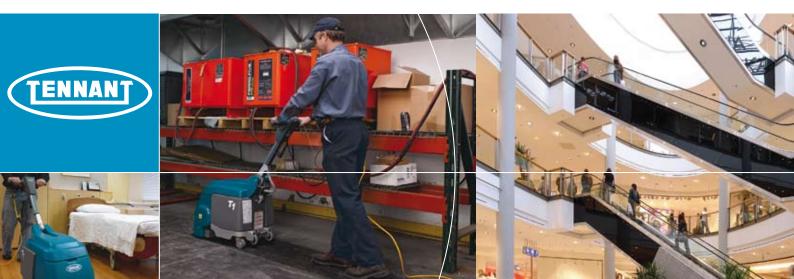

Deliver superior cleaning results in small spaces you couldn't clean before – with compact design, powerful scrubbing action, excellent solution recovery, and fully cleanable Hygenic tanks.

Dramatically improve floor cleanliness

Thoroughly and effortlessly clean congested hard floor spaces, like you never have before, with small, powerful design.

Compact, maneuverable design

Safely and easily clean while traveling forward, in reverse, and turning into tight spaces, with highly maneuverable four-caster design and quick-adjust handle.

Easy to use and maintain

Easy-to-fill, -empty, and -clean Hygenic tanks offer a unique compact design. Ergonomic handles and grips ensure easy handling.

GENUINE TENNANT PARTS, SUPPLIES & SERVICE

Genuine Tennant Parts Advantage

Operate your machine with confidence by choosing genuine Tennant parts. Only authentic Tennant parts are engineered in conjunction with Tennant equipment. For years of worry-free operation, accept only genuine parts and supplies.

Direct Service Network

In Europe, Tennant offers a factory-trained, locally based network of more than 220 service technicians dedicated to keeping your cleaning program up and running. Protect your investment with a Tennant Service Agreement. Choose one of the many Tennant Financial Solutions for easy and quick financing.

For more detailed information on these topics, please contact your Tennant sales person.

T1 CORD-POWERED SCRUBBER-DRYER

APPLICATIONS

Convenience stores Swimming pool decks Food processing areas Quick-serve restaurants Locker rooms

Many other small spaces

SPECIFICATIONS

& kitchens

Cleaning path 380 mm Productivity (per hour) 1480 m² Theoretical max Estimated coverage 810 m² 11 4 1 Solution tank Solution flow rate 0.38 L/min 15 kg Down pressure Recovery tank 17 L Water lift 2184 mm Cord length 15 m

Warranty

Sound level

12 Months on parts and 12 months on labour, excluding wear items.

72 dBA







TENNANT EUROPE NV

Plantin & Moretuslei 220 2018 Antwerp BELGIUM Tel: +32 3 217 94 11 Fax:+32 3 217 94 19

Fax:+32 3 217 94 19 E-mail: europe@tennantco.com

TENNANT UK LTD.

Gladstone Road Northhampton NN5 7RX UNITED KINGDOM Tel: 00800-2255 8366 Fax: 00800-3298 3662

Tel: 01604 583191 (local rate UK only) Fax: 01604 587909 (local rate UK only) E-mail: europe@tennantco.com

TENNANT CEE GmbH

Sommerfeld 1 5202 Neumarkt am Wallersee AUSTRIA Tel: +43 (0)6216 4524 & 4525 Fax: +43 (0)6216 4524 20

Fax: +43 (0)6216 4524 20 E-mail: office@tennant-cee.com